


FIG. 2

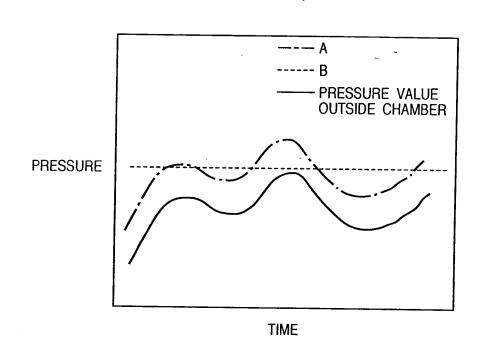

the series of th

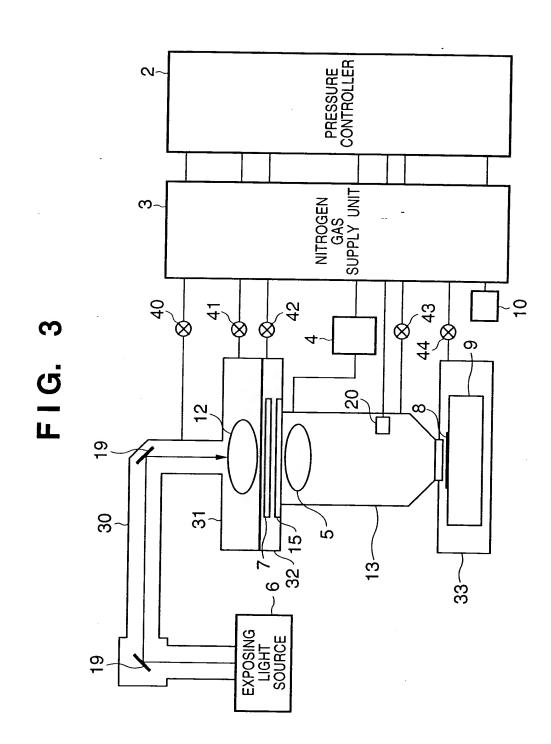


FIG. 4

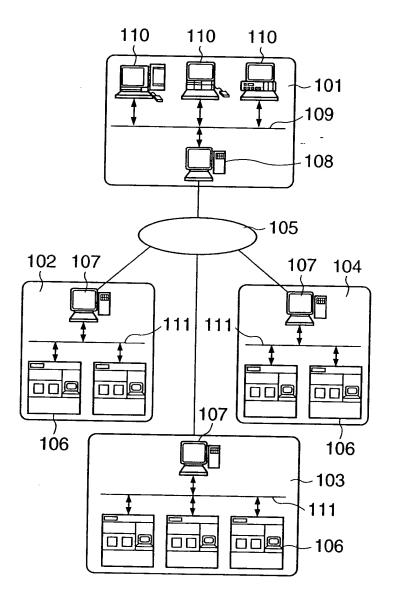


FIG. 5

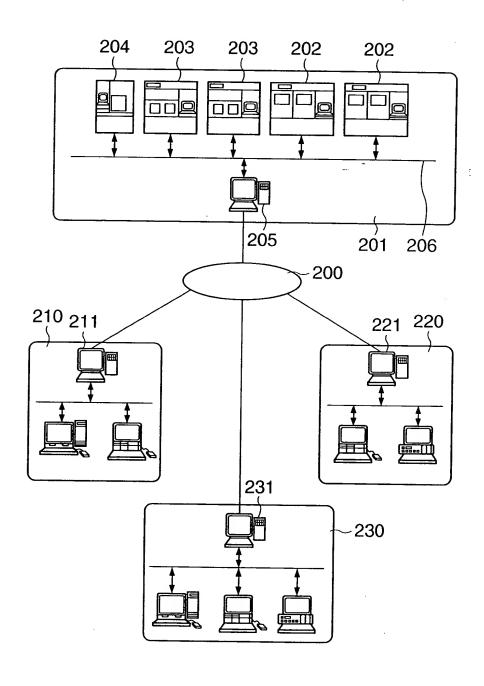


FIG. 6

URL http://www.maintain.co.jp/db/input.html	
MALFUNCTION DATABASE INPUT SCREEN	
DATE OF OCCURRENCE 2000/3/15 404	
MODEL ******** ~ 401	
SUBJECT MATTER OPERATING MALFUNCTION (ERROR AT BO	OTING) ~ 403
EQUIPMENT SERIAL NO. 465NS4580001 ~402	
DEGREE OF URGENCY D ~405	
CONDITION LED CONTENTS FLASHING AFTER 企	
POWER IS TURNED ON 406	•
COUNTERMEASURE POWER TURNED ON AGAIN	
METHOD (RED BUTTON PUSHED AT START UP)	~407
	407
DROCDESS TEMPODARY MEASURES COMPLETED (S)	
PROGRESS TEMPORARY MEASURES COMPLETED 1	
· · · · ·	13
(SEND) (RESET) 410 411	412
LINK TO DATABASE OF RESULTS SOFTWARE LIBRARY OF	PERATING GUIDE
<u> </u>	2.2.17.110

FIG. 7

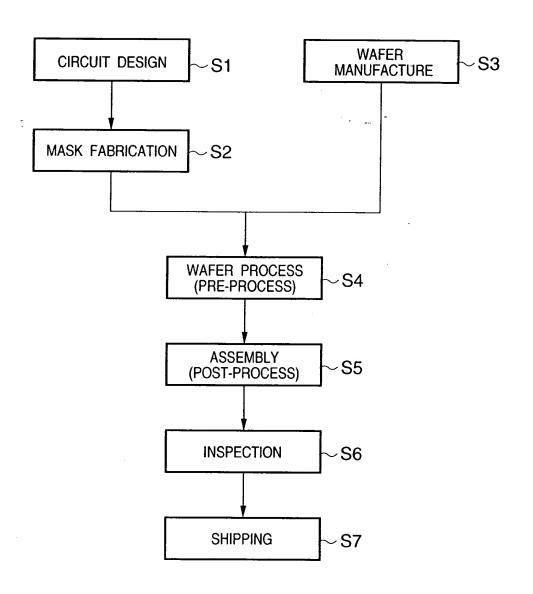


FIG. 8

